

Portable Fans

An ode to the celebration of joy. Hindware Snowcrest Portable fans exemplify the true meaning of happiness with its awe-inspiring beauty.



Wall Fans

SWEEP: 400 MM




Wave

WHITE & TURQUOISE

2 YEARS
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
90	2100	125

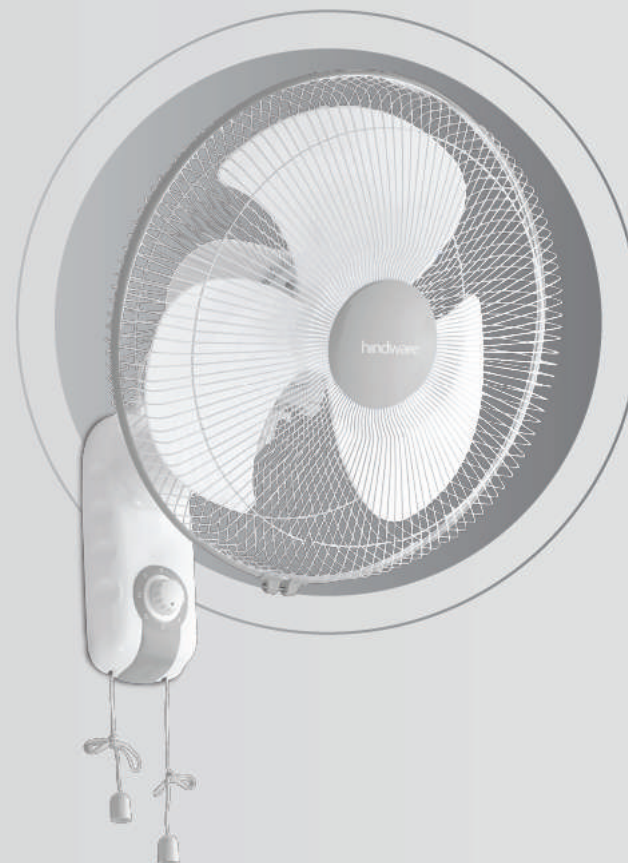

Bliss

WHITE & GREY

2 YEARS
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
70	1350	60



High Air
Delivery*



3 Speed
Control



Child Safety
Guard



Corrosion Resistant
Powder Coated Safety Guard



Low Noise
Operation



180°
Oscillation
Fan




Inbuilt T.O.P (Thermal
Overload Protector)

*High Air Delivery available in 'Wave' model fan only.

Wall Fans New

SWEEP: 400 MM

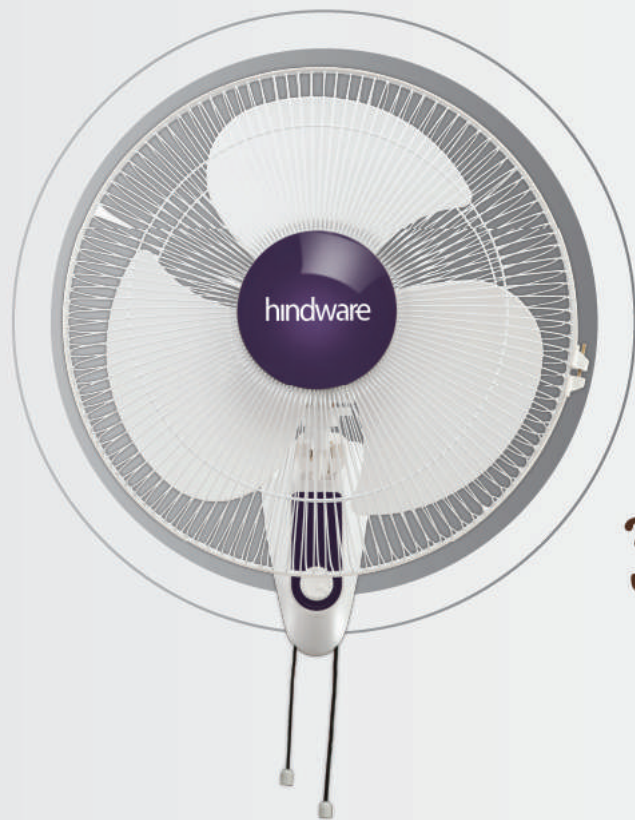

Frias HS

WHITE & INDIGO



Frias NS

WHITE & MUSTARD

2 YEARS
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
90	2100	125

2 YEARS
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
70	1350	60



High Air
Delivery*



3 Speed
Control



Child Safety
Guard



Corrosion Resistant
Powder Coated Safety Guard



Low Noise
Operation



180°
Oscillation
Fan




Inbuilt T.O.P (Thermal
Overload Protector)

*High Air Delivery available in 'Frias HS' model fan only.

hindware
SNOWCREST FANS


Table Fans

SWEEP: 400 MM

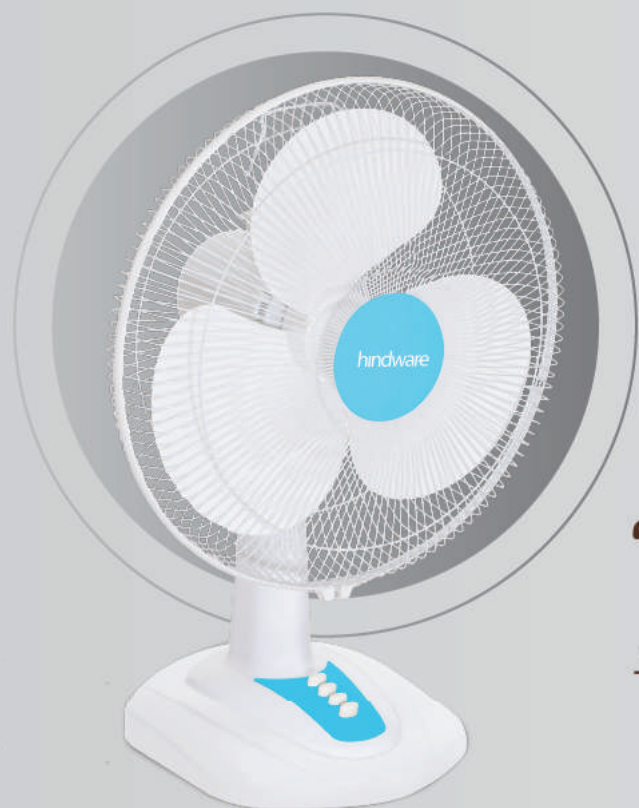

Wave

WHITE & TURQUOISE

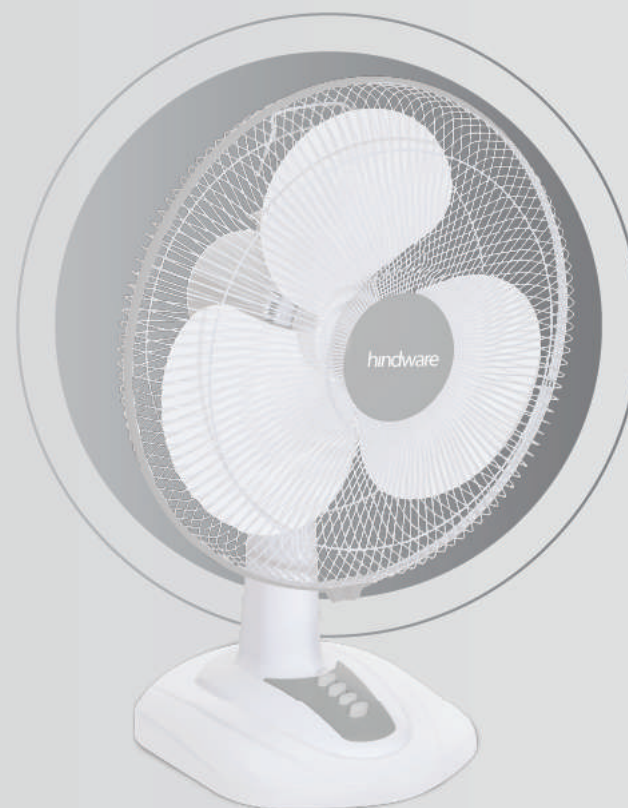

Bliss

WHITE & GREY

2 YEARS
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
90	2100	125

2 YEARS
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
70	1350	60



High Air
Delivery*



3 Speed
Control



Child Safety
Guard



Corrosion Resistant
Powder Coated Safety Guard



Low Noise
Operation



180°
Oscillation
Fan




Inbuilt T.O.P (Thermal
Overload Protector)

*High Air Delivery available in 'Wave' model fan only.

Table Fans New

SWEEP: 400 MM

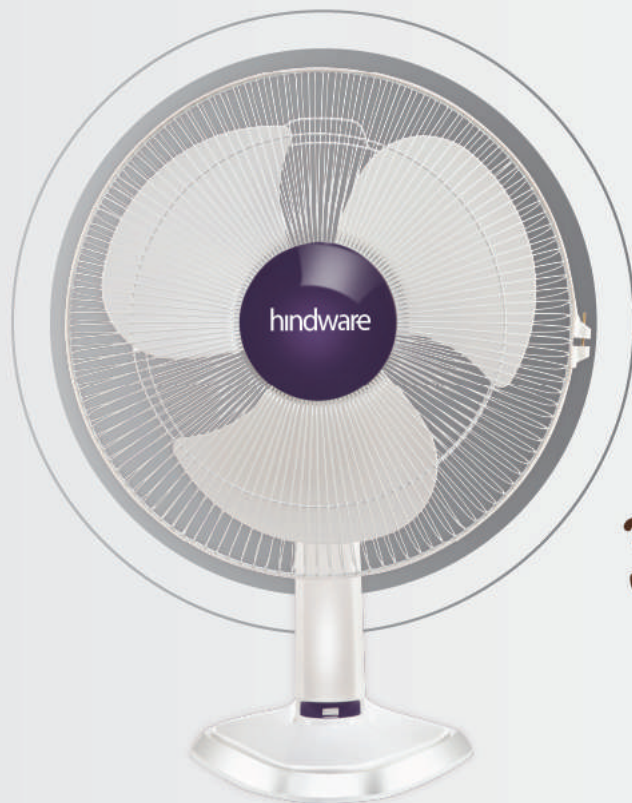

Frias HS

WHITE & INDIGO



Frias NS

WHITE & MUSTARD

2 YEARS
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
90	2100	125

2 YEARS
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
70	1350	60



High Air
Delivery*



3 Speed
Control



Child Safety
Guard



Corrosion Resistant
Powder Coated Safety Guard



Low Noise
Operation



180°
Oscillation
Fan




Inbuilt T.O.P (Thermal
Overload Protector)

*High Air Delivery available in 'Frias HS' model fan only.

hindware
SNOWCREST FANS

Pedestal Fans

SWEEP: 400 MM

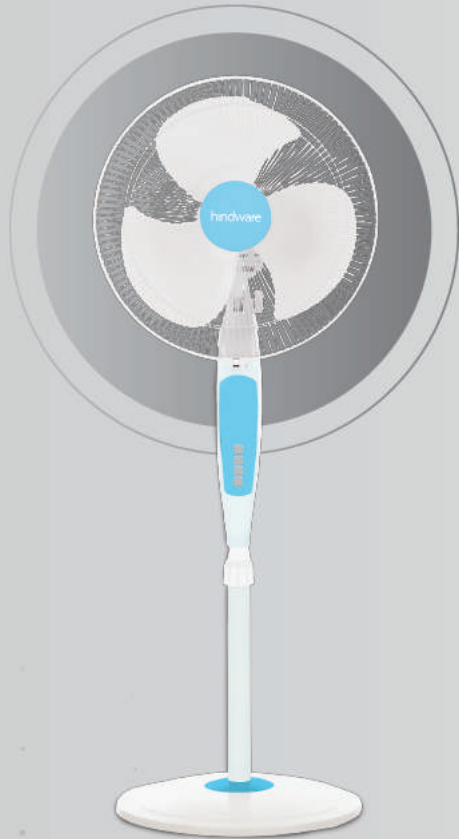


Wave

WHITE & TURQUOISE

2 YEARS
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
90	2100	125

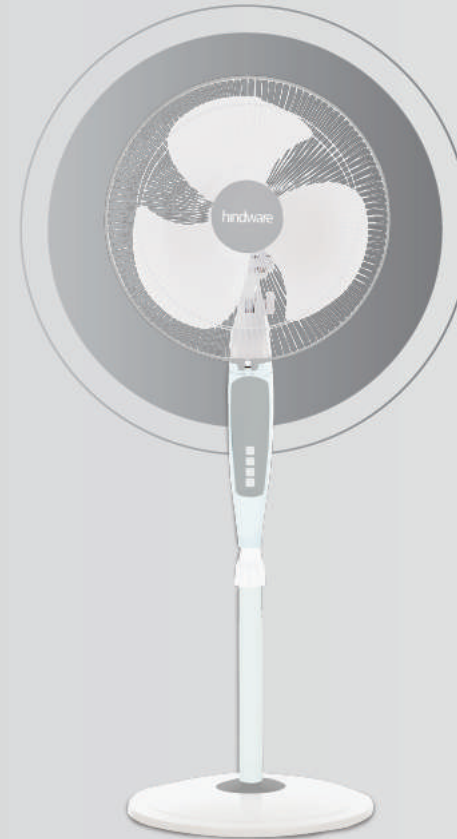

Bliss

WHITE & GREY

2 YEARS
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
70	1350	60



High Air
Delivery*



3 Speed
Control



Child Safety
Guard



Corrosion Resistant
Powder Coated Safety Guard



Low Noise
Operation



180°
Oscillation
Fan



Inbuilt T.O.P (Thermal
Overload Protector)

*High Air Delivery available in 'Wave' model fan only.

Pedestal Fans

New

SWEEP: 400 MM



Frias HS

WHITE & INDIGO

2 YEARS
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
90	2100	125



Frias NS

WHITE & MUSTARD

2 YEARS
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
70	1350	60



High Air
Delivery*



3 Speed
Control



Child Safety
Guard



Corrosion Resistant
Powder Coated Safety Guard



Low Noise
Operation



180°
Oscillation
Fan



Inbuilt T.O.P (Thermal
Overload Protector)

*High Air Delivery available in 'Frias HS' model fan only.

hindware
SNOWCREST FANS

Pedestal Fans



Cyclo

BLACK

SWEEP: 400 MM



Exceto

SILVER GREY

SWEEP: 500 MM

2 YEAR
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
120	2100	105

1 YEAR
WARRANTY

Air Delivery (m ³ /min)	Speed (RPM)	Wattage (W)
145	1400	145



High Air
Delivery*



3 Speed
Control



Child Safety
Guard



Corrosion Resistant
Powder Coated Safety Guard



Low Noise
Operation



180°
Oscillation
Fan



Inbuilt T.O.P (Thermal
Overload Protector)

*Exceto is without oscillation

Calculating 'Sweep': Know how sweep size is important when choosing a fan

The 'sweep' of a fan is determined by taking the distance from the edge of one blade to the centre of the motor and then doubling that number. For example, if the distance between the edge of one blade and the centre of the motor is 24", you would have a 48" (equals to 1200 mm) ($24" \times 2 = 48"$) sweep ceiling fan. The length of the sweep determines the amount of air that a given fan is capable of churning.

You should ideally choose a sweep depending upon the size of your room. A larger room requires a fan with a longer sweep to keep it cool, whereas a smaller room can be effectively cooled with a fan of a shorter sweep.

Ways to get the most out of your ceiling fan:

- The room should ideally be well-ventilated (there should be an open window or door)
- The gap between the ceiling and the blades should be at least 1 feet
- The fan (blades) should be at a height of 8 feet from the floor

Calculate the ideal sweep for your room:

- Find out the prospective fans' sweep in millimeters and multiply it by 2
- Now match the figure against the table below to find the perfect fan for your room

Size of the room	Fan sweep in mm
Upto 10'x 10'	900 or 1050
10'x 10'	1200
10'x 10' or 12'x 12'	1400
More than 12'x 12'	2 or more fans recommended



Premium Fans

Specifications list

Energy Saving Fans

Specifications list

Classic Fans

[illegible]



Specifications list

Wall Fans

Product Name	Wave	Bliss	Frias HS	Frias NS
Sweep (mm)	400	400	400	400
Air Delivery(m ³ /min)	90	70	90	70
Wattage	125	60	125	60
RPM	2100	1350	2100	1350

Table Fans

Product Name	Wave	Bliss	Frias HS	Frias NS
Sweep (mm)	400	400	400	400
Air Delivery(m ³ /min)	90	70	90	70
Wattage	125	60	125	60
RPM	2100	1350	2100	1350



Specifications list

Pedestal Fans

Product Name	Wave	Bliss	Frias HS	Frias NS	Cyclo	Exceto
Sweep (mm)	400	400	400	400	400	500
Air Delivery(m ³ /min)	90	70	90	70	120	145
Wattage	125	60	125	60	105	145
RPM	2100	1350	2100	1350	2100	1400



Specifications list

Exhaust Fans

Product Name	Zorio AX	Zorio AX ARC	Zorio AX NEO	Zorio S
Sweep (mm)	100/150	100/150	100/150	100/150/200
Air Delivery(m ³ /min)	140/240	140/240	140/240	260/500/800
Wattage	20/24	20/24	20/24	26/32/38
RPM	2600/2100	2600/2100	2600/2100	1350/1320/1220

Technical Specifications